INSTALLATION INSTRUCTIONS

These instructions do not claim to cover all details or variations in the equipment, procedure, or process described, nor to provide directions for meeting every possible contingency during installation, operation or maintenance. When additional information is desired to satisfy a problem, not covered sufficiently for user's purpose, please contact your Halo Lighting, Cooper Industries, Inc. representative.

Product H.I.D. Recessed 13" Square Lensed Downlight Rough-In Section.

850822

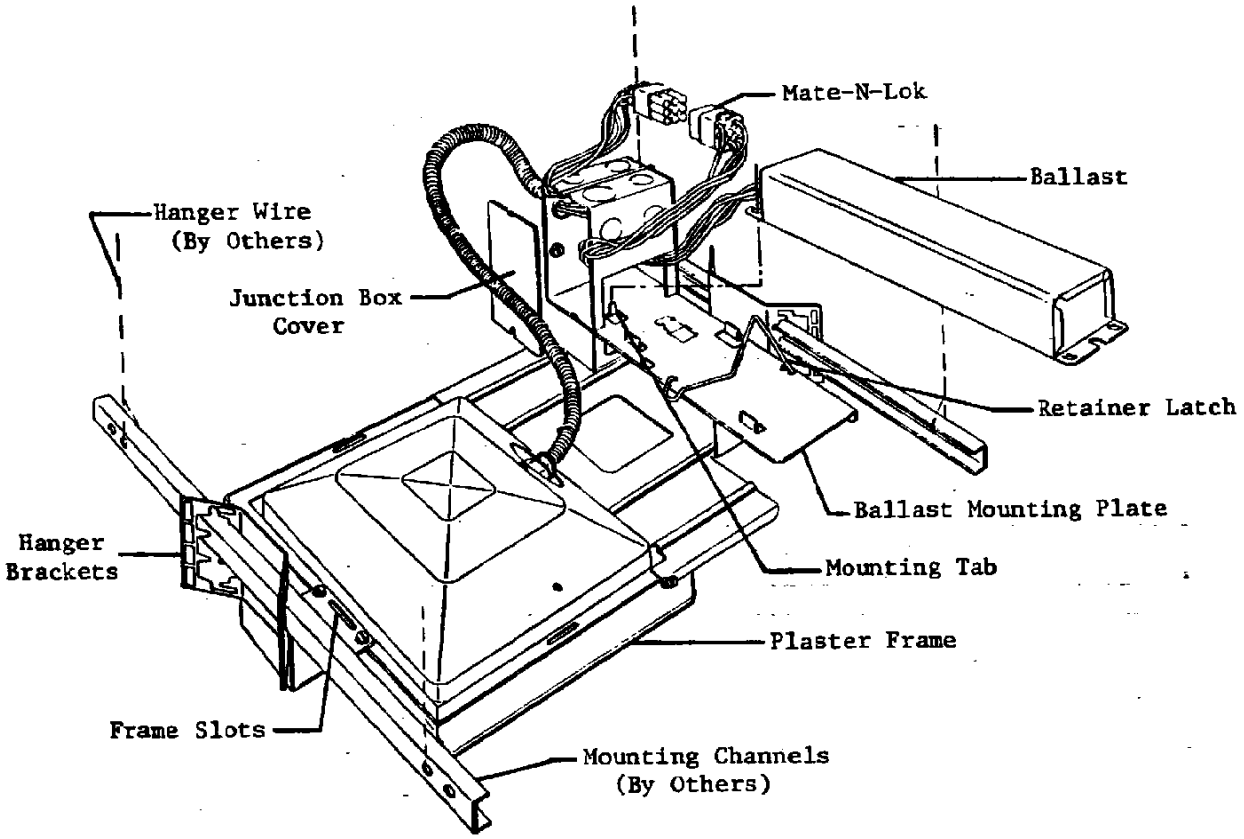

A. Installing Mounting Frame

NOTE: Fixture should be supported by main runners or other structure that is capable of supporting fixture weight of 35 pounds minimum.

1. Mount fixture into ceiling cavity using 1/2" electrical conduit, 3/4" channel, 1-1/2" channel or 1/8" x 1/2" bar stock (supplied by others), by inserting same into hanger bracket at both ends of the fixture as shown.

2. Secure mounting rails to supporting structure with hanger wire or other supporting device.

(OVER)

Printed in USA.
Halo Lighting, Cooper Industries, Inc.
©1985

November, 1985

HALO LIGHTING
Halo Lighting
400 Busse Rd.
Elk Grove Village, Ill. 6

850822